


TECHNICAL DATA	UNIT.	DS-23 STANDARD	
CAPACITY			
Capacity 1/18	Kg	26	
Capacity 1/20	Kg	23	
Hourly Output STANDARD	Kg/h	46	
Evaporation capacity STANDARD	l/h	23,9	
DRUM			
Ø Drum	mm	855	
Ø Door	mm	574	
Door center height	mm	1030	
Load hole bottom height	mm	743	
Drum length	mm	800	
Drum volume	l	460	
POWER			
Drum motor power	Kw	0,37	
Fan Motor Power STANDARD	Kw	0,55	
Total Installed power STANDARD	Kw	24,97	
Electric Heating (Installed power)	Kw	24	
Gas heating (installed Power) in KW	Kw	31	
Gas heating (installed el. power) STANDARD	Kw	0,97	
Steam heating (Steam Power KW)	Kw	49,2	
Steam heating (installed el. power) STANDARD	Kw	0,97	
CONNECTIONS		ELECTRICAL	STEAM / GAS
Tension 230V- I + T	Nº x mm2 / A	-	3 x 1,5 / 20A
Tension 230V- III + T	Nº x mm2 / A	4 x 25 / 80A	4 x 1,5 / 20A
Tension 400V- III + N + T	Nº x mm2 / A	5 x 10 / 40A	5 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"	
Ø Steam inlet	BSP	1"	
Ø Condensed (Steam models)	BSP	1"	
DIMENSIONS / PACKING DIMENSIONS			
Width / Width	mm	890/970	
Depth / Depth	mm	1245/1345	
Height / Height	mm	1812/1940	
Height without heating battery	mm	-	
Net weight / Gross weight	Kg	210/230	
OTHERS			
Max airflow STANDARD	m3/h	1200	
Ø Fume exhaust	mm	200	
Sound level STANDARD	dB	65	

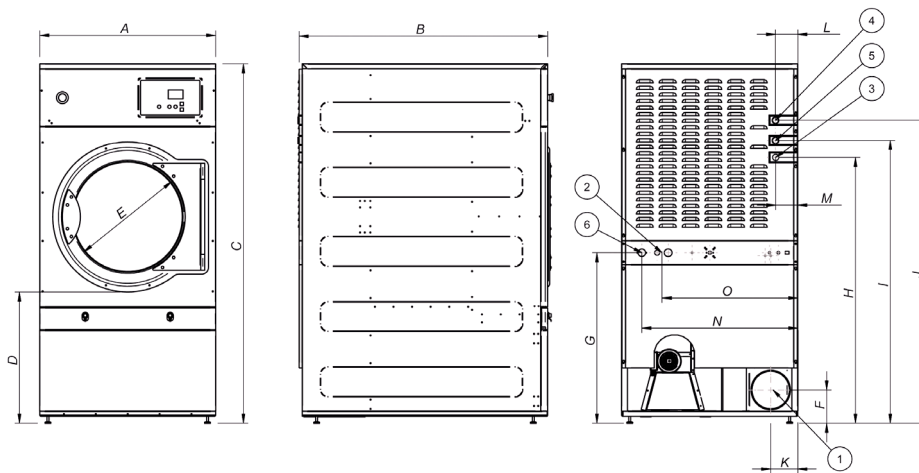

- 01. Fumes outlet
- 02. Electrical connection
- 03. Gas connection
- 04. Steam connection
- 05. Condensation outlet
- 06. Anti fire water valve

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
DS-23	890	1245	1817	672	574	168	862	1344	1430	1532	137	113	112	787	685