


TECHNICAL DATA	UNIT.	DSC-11 PM	DSC-17 PM	DSC-23 PM
CAPACITY				
Capacity 1/18	Kg	11,7	18,3	25,6
Capacity 1/20	Kg	10,5	16,5	23
Hourly Output	Kg/h	10,4	12	12,7
Evaporation capacity	l/h	5,2	6,0	6,4
DRUM				
Ø Drum	mm	750	750	855
Drum length	mm	475	746	800
Drum volume	l	210	330	460
Ø Loading door	mm	574	574	574
POWER				
Drum motor power	kW	0,37	0,37	0,37
Electric Heating (Installed power)	kW	3,8 + 4,0 (7)	3,8 + 4,0 (7)	3,8 + 4,0 (7)
Electric Heating (Total Installed power)	kW	4,65 (8)	4,65 (8)	4,77 (8)
Energetic consumption	* kWh/ l	0,89	0,77	0,75
Nominal airflow	m ³ /h	1.200	1.200	1.200
Fan Motor Power	kW	0,55	0,55	0,55
CONNECTIONS		ELECTRICAL	ELECTRICAL	ELECTRICAL
Tension 400V- III + N + T (50 Hz)	Nº x mm2 / A	5 x 1,5 / 20	5 x 1,5 / 20	5 x 1,5 / 20
Heat pump inlet (Cooling)	inch	1/2"	1/2"	1/2"
Heat pump outlet (Cooling)	inch	1/2"	1/2"	1/2"
Drain	inch	3/4"	3/4"	3/4"
DIMENSIONS / PACKING DIMENSIONS				
Width / Width	mm	785/865	785/865	890/970
Depth / Depth	mm	1.315/1.415	1.585/1.685	1.720/1.820
Height / Height	mm	1.694/1.840	1.694/1.840	1.812/1.940
Net weight / Gross weight	Kg	272/280	287/300	310/330
OTHER				
Sound level	dB	64	64	64

* kWh per litre of evaporated water.

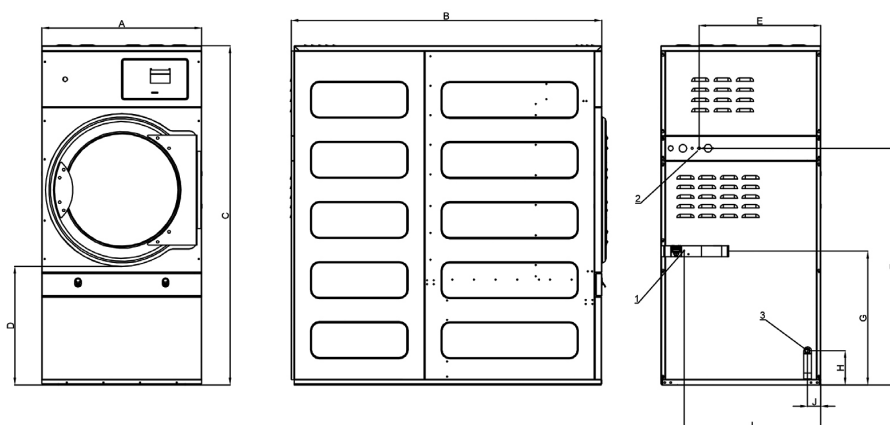

- 01. Refrig. water intake. (mains)
- 02. Electrical connection
- 03. Refrig. water outlet (warm water)

	A	B	C	D	E	F	G	H	I	J
DSC-11	785	1.315	1.694	618	600	1.190	685	210	586	65
DSC-17	785	1.585	1.694	618	600	1.190	680	210	586	65
DSC-23	890	1.720	1.812	672	660	1.190	680	210	646	125