


TECHNICAL DATA	UNIT.	LS-26 T	LS-36 T		
<b>DRUM</b>					
Load capacity 1:9 / 1:10	Kg	28/25	39/35		
Volume	l	250	350		
Diameter	mm	770	860		
Depth	mm	530	602		
<b>GENERAL DETAILS</b>					
Washing speed / Spining speed	r.p.m.	45/1.035	42,5/975		
G Factor	-	450	450		
Maximum force transmitted	KN	4,9 ±1,75	7,5 ±2,45		
Frequency-dynamic force	Hz	15	14,3		
Sound level	dB	70	70		
Self-service version	-	Yes	Yes		
Double drain	-	Opt	Opt		
Weighing System / Tilting System	-	Opt/No	Opt/No		
<b>DOOR</b>					
Height center door / Height door	mm	865/600	885/540		
Diameter	mm	373	560		
<b>POWER</b>					
Motor	kW	3	4		
Heating (Electric model)	kW	18	21		
Max. power (Electric model)	kW	19	22		
Max. power (steam and hot water)	kW	3	4		
<b>CONEXIONES</b>		<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>	<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>
Tension 230V- I + N + T	Nº x mm2 / A	3 x 25 / 100A	3 x 1,5 / 16A	-	-
Tension 230V- III + T	Nº x mm2 / A	3 x 10 / 50A	-	3 x 25 / 100A	3 x 1,5 / 6A
Tension 400V- III + N + T	Nº x mm2 / A	3 x 4 / 32A	-	3 x 16 / 63A	3 x 1,5 / 16A
Steam inlet (Steam mod.)	inch	3/4"		3/4"	
Maximum steam consumption (Steam mod.)	Kg/h	15		18	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kgs/cm <sup>2</sup>	2-4		2-4	
Maximum water consumption*	Lit/h	175,5		261,3	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Width / Width	mm	979/1.040		1.095/1.165	
Depth / Depth	mm	1.041/1.160		1.184/1.230	
Height / Height	mm	1.548/1.850		1.598/1.920	
Net weight / Gross weight	kg	490/545		750/820	
Volume	m <sup>3</sup>	2,23		2,75	

\* N°20 Program, 75% load

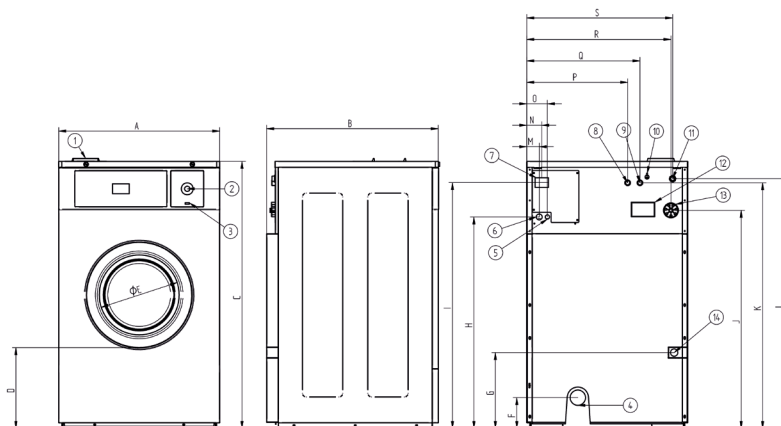

01. Soap dispenser
02. Emergency stop
03. Usb port
04. Drain
05. Electric connection to liquid soap pumps
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Ground connection
11. Cold water inlet
12. Blur output / water overload
13. Liquid soap connection
14. Steam connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
LS-26 T	979	1.041	1.553	610	373	130	532	1.279	1.343	1.282	1.462	1.462	61	74	101	506	586	864	906
LS-36 T	1.095	1.184	1.598	522	560	155	990	1.326	1.494	1.344	1.509	1.509	61	74	101	621	701	979	1.021