


TECHNICAL DATA	UNIT.	CTP-260/100	CTP-330/100
GENERAL DETAILS			
Theoretical production (45%) humidity	Kg/h	190-230	250-290
Ø Roll	mm	1.000	1.000
Working width	mm	2.600	3.300
Height floor-feeding	mm	1.110	1.110
Working speed	mt/min	4-18	4-18
Control type	-	Touch	Touch
Programmes	Nº	20	20
Side stacker	Nº	Yes	Yes
FOLDING			
1 lane- Primary fold	Nº	1-2	1-2
1 lane- Cross fold	Nº	1-2-3	1-2-3
2 lanes- Primary fold	Nº	1-2	1-2
2 lanes- Cross fold	Nº	1-2	1-2
POWER			
Heating power (electric model)	kW	90	90
Total electric power (electric model)	kW	94	94
Heating power (gas model)	kW	120	156
Total electric power (gas model)	kW	4	4
Heating power (steam model)	kW	120	150
Total electric power (steam model)	kW	4	4
CONNECTIONS			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet	BSP	1-1/4"	1-1/4"
Ø Condensed (Steam model)	BSP	1"	1"
Ø Air inlet	mm	12	12
DIMENSIONS / PACKAGING DIMENSIONS			
Width / Width	mm	3.718 / 3.800	4.418 / 4.500
Depth / Depth	mm	2.289 / 2.380	2.289 / 2.380
Height / Height	mm	2.279 / 2.529	2.279 / 2.529
Weight / Weight	Kg	3.960 / 4.410	4.460 / 5.110
Volume	m3	19,40 / 22,87	23,05 / 27,09
OTHER			
No. Fume outlet	Nº	2	2
Ø Fume outlet	mm	120	120
Air flow	m3/h	2 x 1.000	2 x 1.000
Air Consumption (6,5 Bar)	Nl/h	21.000	21.000
Sound Level	dB	70	70

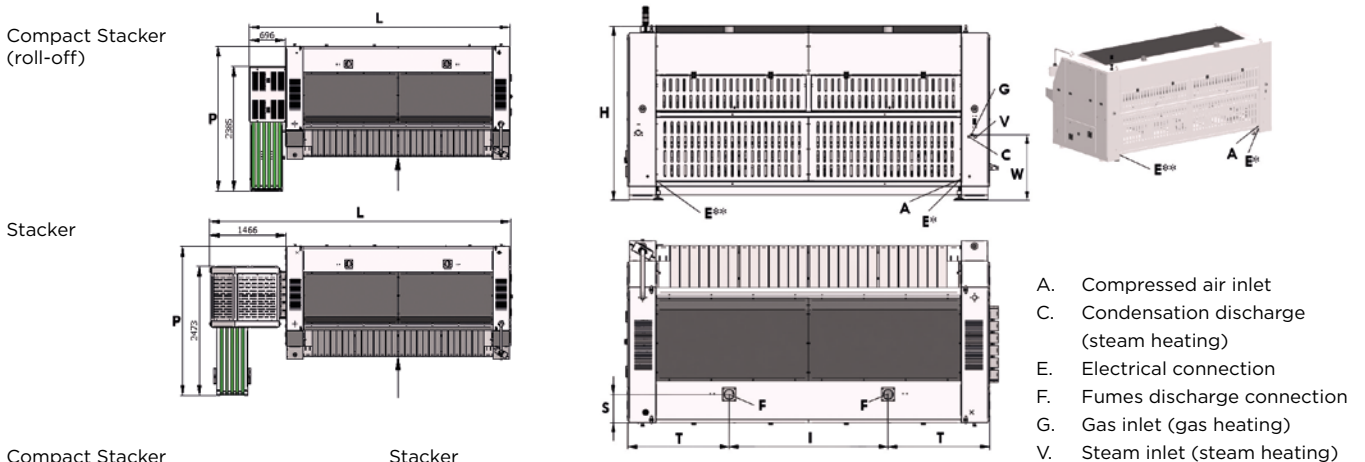

	Compact Stacker		Stacker	
	L	P	L	P
CTP-260/100	4.309	2.856	5.070	2.945
CTP-330/100	5.009	2.856	5.770	2.945

	H	I	T	S	A	C	E	F	G	V	W
CTP-260/100	2.247	1.196	1.208	345	Ø 12	1"	5G4	Ø 120	1"	1-1/4"	800
CTP-330/100	2.247	1.896	1.208	345	Ø 12	1"	5G4	Ø 120	1"	1-1/4"	800

* Linen right exit
** Linen left exit

While every effort has been made to ensure the information provided is accurate, MAG Equipment Ltd accepts no liability whatsoever for any errors, inaccuracies or omissions and shall not be bound in any manner by any information provided.