


TECHNICAL DATA	UNIT.	DS-11 EXCELLENCE	DS-17 EXCELLENCE		
<b>CAPACITY</b>					
Capacity 1/18	Kg	12	18		
Capacity 1/20	Kg	11	17		
Hourly Output EXCELLENCE	Kg/h	27	43		
Evaporation capacity EXCELLENCE	l/h	14,17	22,4		
<b>DRUM</b>					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	976	976		
Load hole bottom height	mm	689	689		
Drum length	mm	475	746		
Drum volume	l	210	330		
<b>POWER</b>					
Drum motor power	Kw	0,25	0,25		
Fan Motor Power EXCELLENCE	Kw	0,55	0,55		
Total Installed power EXCELLENCE	Kw	12,85	18,85		
Electric Heating (Installed power)	Kw	12	18		
Gas heating (installed Power) in KW	Kw	20,51	20,51		
Gas heating (installed el. power) EXCELLENCE	Kw	0,85	0,85		
Steam heating (Steam Power KW)	Kw	30	30		
Steam heating ( installed el. power) EXCELLENCE	Kw	0,85	0,85		
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>STEAM / GAS</b>	<b>ELECTRICAL</b>	<b>STEAM / GAS</b>
Tension 230V- I + T	Nº x mm2 / A	3 x 35 / 63A	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V- III + T	Nº x mm2 / A	4 x 10 / 40A	4 x 1,5 / 20A	4 x 16 / 63A	4 x 1,5 / 20A
Tension 400V- III + N + T	Nº x mm2 / A	5 x 4 / 25A	5 x 1,5 / 20A	5 x 10 / 32A	5 x 1,5 / 20A
Ø Gas inlet	BSP		1/2"		1/2"
Ø Steam inlet	BSP		3/4"		3/4"
Ø Condensed (Steam models)	BSP		3/4"		3/4"
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Width / Width	mm		785 / 865		785 / 865
Depth / Depth	mm		840 / 940		1110 / 1210
Height / Height	mm		1694 / 1840		1694 / 1840
Height without heating battery	mm		-		-
Net weight / Gross weight	Kg		172 / 180		187 / 200
<b>OTHERS</b>					
Max airflow EXCELLENCE	m3/h		1200		1200
Ø Fume exhaust	mm		200		200
Sound level EXCELLENCE	dB		64		64

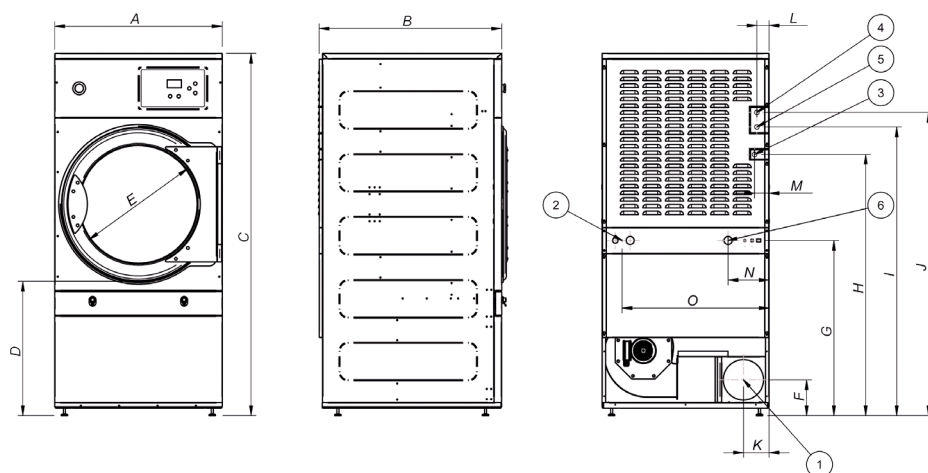

01. Fumes outlet
02. Electrical connection
03. Gas connection
04. Steam connection
05. Condensation outlet
06. Anti fire water valve

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
DS-11	785	840	1700	618	574	168	821	1226	1354	1422	121	56	68	192	690
DS-17	785	1010	1700	618	574	168	821	1226	1354	1422	121	56	68	192	690